


# Large Digit Display – 100mm digit height

## LD-IV Analog input

DCmA, DCmV or DCV input



The LD-IV with the 100mm displays will be ideal for those applications where load, pressure, weight or position indications, for example, need to be visible from a distance up to 50m. Foundries, smelters, weigh-bridges, storage tanks and silos are just some of the possible applications for these large digit displays.

### Display examples



4 digit 100mm Red LED




4 digit 100mm Green High Contrast (S/S Case)

### Mounting brackets

The 100mm models are shipped with 4 metal brackets and mounting hardware.

The diagrams illustrate vertical and horizontal installation of these brackets. If mounting without the brackets, then the 9mm diameter case holes provided for the brackets can be used as alternative mounting holes. If the brackets are not used in mounting, then these holes should be sealed against dust and water.

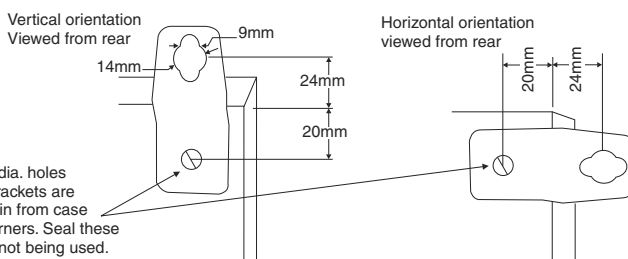

Use these 9mm dia. holes for mounting if brackets are not used. 20mm in from case edges at all 4 corners. Seal these holes if they are not being used.

### Features

- Input from  $\pm 20\text{mA}$ , 4-20mA,  $\pm 2.5\text{VDC}$  or  $\pm 25\text{VDC}$
- 4 or 6 digit 100mm Red LED
- High contrast daylight viewable versions now available in 4 or 6 digit red, green, amber or white LED
- 4, 5, or 6 digit 100mm Yellow Electromagnetic
- IP65 rated wall mount enclosure, powder coated steel standard, stainless steel optional
- Dual 4-20mA analog retransmission model available
- 4 configurable setpoint relays standard rated at 240VAC, 5A into a resistive load, form C. Relays 1 and 2 may be configured for either setpoint or PI control
- Pushbutton setup and calibration, display can be scaled without special tools
- 2 calibration memories can be stored
- 3 configurable remote inputs as standard
- Remote inputs can be configured to one of a wide range of functions including zero, tare, peak hold, etc.
- Programmable digital filter
- RS232 or RS485 serial communications optionally available
- Inbuilt data logger optionally available
- The auto-brightness feature for LED displays varies the display brightness to suit the ambient light
- 2 year guarantee
- See separate brochures for 38, 45, 57mm, 58mm and 200mm display models



LDIV100-4.6-0

AMALGAMATED INSTRUMENT CO PTY LTD

ACN: 001 589 439

Unit 5, 28 Leighton Place Hornsby  
NSW 2077 Australia

Telephone: +61 2 9476 2244  
Facsimile: +61 2 9476 2902



e-mail: sales@aicpl.com.au  
Internet: www.aicpl.com.au

## Specifications

Input:	$\pm 20\text{mA}$ , 4-20mA, $\pm 2.5\text{VDC}$ or $\pm 25\text{VDC}$
Input impedance	64 $\Omega$ nominal for 4 to 20mA/20mA range and 1M $\Omega$ on DC voltage ranges
Accuracy:	Better than 0.1% of full scale (alarms and display) when calibrated
Sample rate:	5 samples/second
Display update:	4 times per second
ADC resolution:	1 in 32,000
ADC conversion:	Sigma delta
Microprocessor:	MC68HC11 CMOS
Ambient temp:	-10°C to 60°C
Humidity:	5% to 95% non condensing
Display types:	100mm 4 or 6 digit red LED 100mm 4 or 6 digit red, green, amber or white high contrast LED 100mm 4 digit yellow electromagnetic (flip digit) 100mm 5 digit yellow electromagnetic (flip digit) 100mm 6 digit yellow electromagnetic (flip digit) See separate LD-IV brochures for other display sizes
Transmitter supply:	Selectable 5, 10, 12 or 24VDC (25mA max. except for 10V which is 50mA max.)
Power supply:	See order code table (type is factory configured)
Power usage:	AC supply: 50VA max, DC supply: typically 300mA at 24VDC for 4 digit standard LED displays (1A peak), typically 450mA at 24VDC for 6 digit standard LED displays (1.5A peak), typically 600mA at 24VDC for 4 digit high contrast LED displays (1A peak), typically 900mA at 24VDC for 6 digit high contrast LED displays (1.5A peak), typically 1A for electromagnetic displays (4A peak) (plus current drawn from transmitter supply)
Outputs (standard):	4 x relays, form C, rated at 240VAC, 5A resistive Relays 1 and 2 configurable for setpoint or PI control
Outputs (optional):	See order code table (type is factory configured)
Relay action:	Programmable N.O. or N.C.
Environmental rating:	IP65
Weight:	4 digit displays 10.5kg, 5 digit displays 12kg, 6 digit displays 13.5kg
Dimensions:	4 digit displays 450 x 250 x 155mm 5 digit displays 520 x 250 x 155mm 6 digit displays 650 x 250 x 155mm

## Optional shrouds

Shroud kits for 100mm displays consist of 2 side panels, a top plate (length is model dependant) and fixing hardware. The overhang of the shroud is 90mm for all models. The shrouds are of powder coated zinc coated steel to match the metal enclosures.

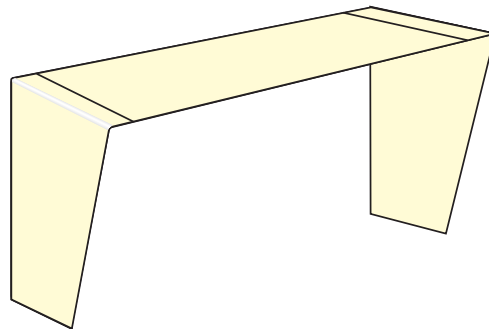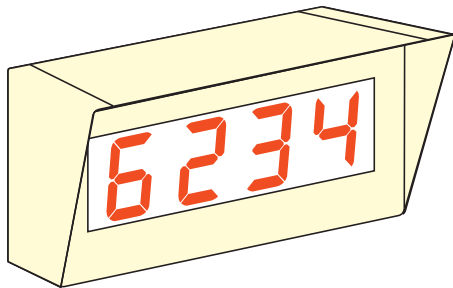

LDIV100-4.6-0

---

**AMALGAMATED INSTRUMENT CO PTY LTD**

ACN: 001 589 439

Unit 5, 28 Leighton Place Hornsby  
NSW 2077 Australia

Telephone: +61 2 9476 2244  
Facsimile: +61 2 9476 2902

e-mail: sales@aicpl.com.au  
Internet: www.aicpl.com.au

## LD-IV order codes for 100mm displays

The last two sections are for optional items (if required).

Optional outputs are factory configured. Analog outputs cannot be retrofitted.

LD-IV- [ ] - [ ] - [ ] - [ ]	
ACL	Power supply
ACH	24 or 32 or 42 or 48VAC
DC	240VAC or 110VAC
	12-24VDC isolated
	<b>Display type</b>
100R4	100mm 4 digit red led
100R6	100mm 6 digit red led
100D4	100mm 4 digit red led - high contrast daylight viewable
100G4	100mm 4 digit green led - high contrast daylight viewable
100A4	100mm 4 digit amber led - high contrast daylight viewable
100D6	100mm 6 digit red led - high contrast daylight viewable
100G6	100mm 6 digit green led - high contrast daylight viewable
100A6	100mm 6 digit amber led - high contrast daylight viewable
100E4	100mm 4 digit yellow electromagnetic flip digit
100E5	100mm 5 digit yellow electromagnetic flip digit
100E6	100mm 6 digit yellow electromagnetic flip digit
	<b>Optional outputs</b>
232	RS232 serial communications
485	RS485 serial communications - non isolated
485 - I	RS485 serial communications - isolated
DL1 - 232	32k internal datalogger plus RS232 serial communications
DL1 - 485	32k internal datalogger plus RS485 serial communications - non isolated
DL1 - 485 - I	32k internal datalogger plus RS485 serial communications - isolated
DL2 - 232	128k internal datalogger plus RS232 serial communications
DL2 - 485	128k internal datalogger plus RS485 serial communications - non isolated
DL2 - 485 - I	128k internal datalogger plus RS485 serial communications - isolated
AA	Dual 4-20mA output
AA - 232	Dual 4-20mA output plus RS232 serial communications
AA - 485	Dual 4-20mA output plus RS485 serial communications - non isolated
AA - 485 - I	Dual 4-20mA output plus RS485 serial communications - isolated
AA - DL1 - 232	Dual 4-20mA output plus 32k internal datalogger plus RS232 serial communications
AA - DL1 - 485	Dual 4-20mA output plus 32k internal datalogger plus RS485 serial communications - non isolated
AA - DL1 - 485 - I	Dual 4-20mA output plus 32k internal datalogger plus RS485 serial communications - isolated
AA - DL2 - 232	Dual 4-20mA output plus 128k internal datalogger plus RS232 serial communications
AA - DL2 - 485	Dual 4-20mA output plus 128k internal datalogger plus RS485 serial communications - non isolated
AA - DL2 - 485 - I	Dual 4-20mA output plus 128k internal datalogger plus RS485 serial communications - isolated
	<b>Case type</b>
SS	Stainless steel case for 4 digit displays (other sizes available on special order). Leave this space blank if the stainless steel version case is not required

## Applications/input types available with large digit display models

- Analog input, process transmitters etc.  $\pm 20\text{mA}$ , 4-20mA or  $\pm 2.5\text{VDC}$  or  $\pm 25\text{VDC}$
- Pulse input, rate, total, count, grand total (encoders, switches, proximity sensors etc.)
- Temperature - RTD, thermocouple, 4-20mA
- Weighing - 4 or 6 wire mV/V output loadcells
- Pressure measurement - 4 or 6 wire mV/V pressure sensors or 4-20mA analog transducers
- Liquid level measurement - 4 or 6 wire mV/V pressure sensors or 4-20mA analog transducers
- Serial input - RS232, RS485, Serial current loop for slave displays etc.
- Synchronous Serial Interface (SSI) for high accuracy position etc. measurement
- Binary, BCD or Gray Code input
- Real Time clock with alarms
- Multifunction timer - elapsed time, stopwatch, run time etc.

LDIV100-4.6-0

**AMALGAMATED INSTRUMENT CO PTY LTD**

ACN: 001 589 439

Unit 5, 28 Leighton Place Hornsby  
NSW 2077 Australia

Telephone: +61 2 9476 2244  
Facsimile: +61 2 9476 2902

e-mail: sales@aicpl.com.au  
Internet: www.aicpl.com.au